



Lighting solutions - 2024

OSRAM
LED TECHNOLOGY INCLUDED

SAYAN
ELECTRIC



Factory

No.3-A1 St.-1st Phase Industrial Zone
Jolfa-Aras Free Zone-Iran

+98 41 42 03 16 65
+98 41 42 03 13 65



Headquarters

Unit 1-11th Floor-Iran Trade
Center Tower-Africa Blv.
Tehran-Iran

+98 21 92 00 29 20
+98 21 26 29 19 71



R&D Center

West Azerbaijan Science &
Technology Park 11th Km
Serow Road-Urmia-Iran

+98 44 32 75 07 39
+98 44 32 75 03 39



info@sayanelectric.ir

@sayanelectric

@sayanelectric

**General Lighting
Product Brochure**

**Good Light
Good Life**



Panel Lights

ARAL

Power (w) : 35 | 45 | 60 | 80 | 40 | 60 | 75
Luminous Flux (lm): 3800 | 4800 | 6400 | 8500 | 4500 | 6700 | 8400
Efficacy (lm/w) : 106 | 108 | 112
Dimensions (cm) : 60 x 60
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



RECESSED

ARAL PLUS

Power (w) : 35 | 45 | 60 | 80 | 40 | 60 | 75 | 60
Luminous Flux (lm): 3800 | 4800 | 6400 | 8500 | 4500 | 6700 | 8400 | 6000
Efficacy (lm/w) : 106 | 108 | 112 | 100
Dimensions (cm) : 60 x 60
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44 | 54



RECESSED

ARAL MINI

Power (w) : 15
Luminous Flux (lm) : 1500
Efficacy (lm/w) : 100
Dimensions (cm) : 20 x 20
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

ARAL MINI

Power (w) : 24 | 30
Luminous Flux (lm) : 2600 | 3300
Efficacy (lm/w) : 108 | 110
Dimensions (cm) : 30 x 30
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

ARAS

Power (w) : 45 | 60 | 80 | 40 | 60 | 75 | 60
Luminous Flux (lm): 4800 | 6400 | 8500 | 4500 | 6700 | 8400 | 6000
Efficacy (lm/w) : 106 | 112 | 100
Dimensions (cm) : 60 x 60
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



SURFACE MOUNTED

ARAS C

Power (w) : 24 | 30 | 40 | 30 | 30 | 60 | 60
Luminous Flux (lm): 2600 | 3300 | 4500 | 3000 | 3000 | 6000 | 6000
Efficacy (lm/w) : 108 | 110 | 112 | 100
Dimensions (cm) : 30 x 30 | 30 x 120 | 20 x 60 | 30 x 60 | 20 x 100
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



REC. / SURF.

ARAD

Power (w) : 60
Luminous Flux (lm) : 6000
Efficacy (lm/w) : 100
Dimensions (cm) : 60 x 60
CCT (°k) : 4000
IP Rating : 54



SMART / HCL

ARATA

Power (w) : 50
Luminous Flux (lm) : 5500
Efficacy (lm/w) : 110
Dimensions (cm) : 60 x 60
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

New Products

Outdoor Series

NIKA

Power (w) : 33 | 100
Luminous Flux (lm): 5300 | 16000
Efficacy (lm/w) : 160
Height (cm) : 300 | 500
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 65



Mitra

Power (w) : 12 | 24 | 30 (Per 1 Meter)
Luminous Flux (lm): 1200 | 2400 | 3000 (Per 1 Meter)
Efficacy (lm/w) : 100
Dimensions (cm) : Customized Length
CCT (°k) : 2200 - 3000 - 4000 - 6500
IP Rating : 65



NEW PRODUCTS

DENIZ

Power (w) : 18
Luminous Flux (lm) : 1800
Efficacy (lm/w) : 100
Diameter (cm) : 25
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40
Sensor Type : Microwave Sensor



SENSOR LIGHT

This Product Can Be Manufactured Equipped With Motion Sensor & Emergency Battery.

DARYA

Power (w) : 22
Luminous Flux (lm): 2200
Efficacy (lm/w) : 100
Dimensions (cm) : 25 x 25
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 54



SURFACE MOUNTED

EMERGENCY LIGHTS



TUNA L

Power (w) : 8
Function : Route Direction
Battery : No Battery
Dimensions (cm) : 27 x 20
Visible Distance (m) : 28



TUNA LB

Power (w) : 5
Function : Route Direction
Battery : Ni - Cd , 3.6 V
Dimensions (cm) : 27 x 20
Visible Distance (m) : 28



TUNA M

Power (w) : 5
Function : Route Direction
Battery : Ni - Cd , 3.6 V
Dimensions (cm) : 27 x 20
Visible Distance (m) : 28

EMERGENCY



SARO

Power (w) : 4.5
Function : Route Direction
Battery : Ni - Cd , 2.4 V
Dimensions (cm) : 27 x 20
Visible Distance (m) : 28



TETRA

Power (w) : 2 x 9
Function : Anti - Panic
Battery : Lead - Acid , 12 V
Dimensions (cm) : 20 x 24

Outdoor Series

VENUS

Power (w) : 40 | 75 | 125 | 135 | 180 | 210 | 240
Luminous Flux (lm): 6000 | 10500 | 16000 | 17500 | 24000 | 28000 | 32000
Efficacy (lm/w) : 130 | 150
Dimensions (cm) : 30 x 60 | 36 x 70
CCT (°k) : 5000 - 6500
IP Rating : 65



Street Light

CHICHEST

Power (w) : 70 | 100
Luminous Flux (lm): 10150 | 14500
Efficacy (lm/w) : 145
Dimensions (cm) : 45 X 24
CCT (°k) : 4000- 5000- 6500
IP Rating : 66



Street Light

TORCHAN UFO

Power (w) : 180
Luminous Flux (lm): 24000
Efficacy (lm/w) : 133
Dimensions (cm) : 15 x 45
CCT (°k) : 4000 - 6500
IP Rating : 65



Flood Light

EKIN

Power (w) : 100 | 120 | 150
Luminous Flux (lm): 11300 | 13560 | 16950
Efficacy (lm/w) : 113
Dimensions (cm) : 15 x 12
CCT (°k) : Full Spectrum
IP Rating : 65



Horticulture

TIDA

Power (w) : 100
Luminous Flux (lm): 14000
Efficacy (lm/w) : 140
Dimensions (cm) : 30 x 10
CCT (°k) : 4000 - 6500
IP Rating : 65



Flood Light

OSCAR

Power (w) : 120
Luminous Flux (lm): 16500 | 17800
Efficacy (lm/w) : 137 | 147
Dimensions (cm) : 15 x 30
CCT (°k) : 4000 - 6500
IP Rating : 65



Flood Light

Downlights

MATIS C

Power (w) : 8 | 10 | 20 | 30
Luminous Flux (lm) : 800 | 1200 | 2400 | 3600
Efficacy (lm/w) : 100 | 120
Cutout Size (cm) : 8 | 15 | 20
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

MANA

Body Material : ABS
Cutout Size (cm) : 8 ~ 9

This Product Has Adjustable Jaw Up To 30 Degrees.



Downlight Frame

MATIA

Power (w) : 5 | 7.5
Luminous Flux (lm) : 500 | 750
Efficacy (lm/w) : 100
Cutout Size (cm) : 7.5
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

MARS C

Power (w) : 10 | 15 | 20 | 30 | 42 | 45
Luminous Flux (lm) : 1000 | 1400 | 2000 | 2800 | 4400
Efficacy (lm/w) : 93 | 97 | 100 | 105
Cutout Size (cm) : 8 | 10 | 12 | 14 | 15
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



RECESSED

TAURUS

Power (w) : 12
Luminous Flux (lm): 1500
Efficacy (lm/w) : 125
Cutout Size (cm) : 8
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40

Trimless Mounting Spotlight.



TRIMLESS RECESSED

NIRVANA C8

Power (w) : 10
Luminous Flux (lm) : 1000 | 1200
Efficacy (lm/w) : 100 | 120
Diameter (cm) : 8
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



REC./SURF./PEND.

NIRVANA CL8

Power (w) : 10
Luminous Flux (lm) : 1200
Efficacy (lm/w) : 120
Diameter (cm) : 8
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



REC./SURF./PEND.

Linear Lights

GALAXY R


Power (w) : 30 | 60 (Per 1 Meter)
Luminous Flux (lm): 3000 | 6000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



RECESSED

GALAXY T

Power (w) : 30 | 60 (Per 1 Meter)
Luminous Flux (lm): 3000 | 6000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40

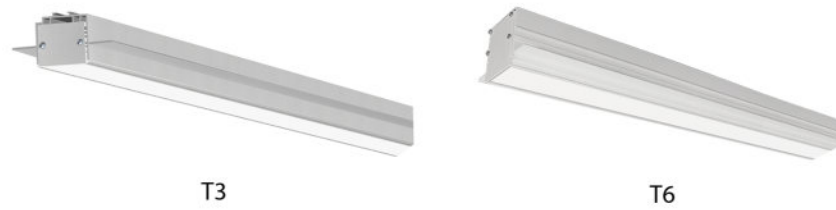

TRIMLESS

Trimless Mounting Linear Light.

GALAXY S

Power (w) : 30 | 60 | 90 (Per 1 Meter)
Luminous Flux (lm): 3000 | 6000 | 9000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



SURFACE MOUNTED

The 90 [w] Version Length Is 120 cm .

GALAXY P

Power (w) : 30 | 60 | 90 (Per 1 Meter)
Luminous Flux (lm): 3000 | 6000 | 9000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



PENDANT

The 90 [w] Version Length Is 120 cm .

GALAXY UP & DOWN

Power (w) : 60 | 90 (Per 1 Meter)
Luminous Flux (lm): 6000 | 9000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 44



PENDANT

GIZLI

Power (w) : 12 | 30 (Per 1 Meter)
Luminous Flux (lm): 1200 | 3000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 2200 - 3000 - 4000 - 6500
IP Rating : 20



HIDDEN LIGHT

MIRA

Power (w) : 30 (Per 1 Meter)
Luminous Flux (lm): 3000 (Per 1 Meter)
Efficacy (lm/w) : 100
Length (cm) : Customized Length
CCT (°k) : 2200 - 3000 - 4000 - 6500
IP Rating : 44



SURFACE MOUNTED

High Bay Series

ALPHA

Power (w) : 24 | 48 | 72 | 120
Luminous Flux (lm): 2600 | 5200 | 8600 | 12000
Efficacy (lm/w) : 108 | 108 | 120 | 100
Length (cm) : 128
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 65

Also Available To use With T8 LED And T8 FL Lamps .



SURFACE MOUNTED

ARC ECO SMD

Power (w) : 45 | 90
Luminous Flux (lm): 4500 | 9000
Efficacy (lm/w) : 100
Length (cm) : 60 | 120
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



SURFACE MOUNTED

ARC ECO

Power (w) : Depending On Used Lamp
Luminous Flux (lm): Depending On Used Lamp
Efficacy (lm/w) : Depending On Used Lamp
Length (cm) : 120
CCT (°k) : Depending On Used Lamp
IP Rating : 40

Compatible With Using T8 LED Tube And Fluorescent Lamps.



SURFACE MOUNTED

ELIT

Power (w) : 60
Luminous Flux (lm): 6000
Efficacy (lm/w) : 100
Length (cm) : 100
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 65



SURFACE MOUNTED

ELIT P

Power (w) : 60 | 70
Luminous Flux (lm): 6000 | 7000
Efficacy (lm/w) : 100
Length (cm) : 100 | 120
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 65



SURFACE MOUNTED

ELIT P MINI

Power (w) : 30
Luminous Flux (lm): 3000
Efficacy (lm/w) : 100
Length (cm) : 100
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 65



SURFACE MOUNTED

LALEH

Power (w) : 15
Luminous Flux (lm): 1500
Efficacy (lm/w) : 100
Length (cm) : 58
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



DECORATIVE

BETA UVC

Power (w) : 15
Dominant Wavelength (nm) : 254
Length (cm) : 48
Coverage Area (m²) : 15
Effectiveness Time (min) : 30



DISINFECTANT

LED Tube

Power (w) : 12 | 24 | 36
Luminous Flux (lm): 1300 | 2600 | 3900
Efficacy (lm/w) : 108
Length (cm) : 60 | 120 | 150
CCT (°k) : 3000 - 4000 - 6500
IP Rating : 40



LAMP